


relax and allow us
to take control

Vibration Isolator P 71

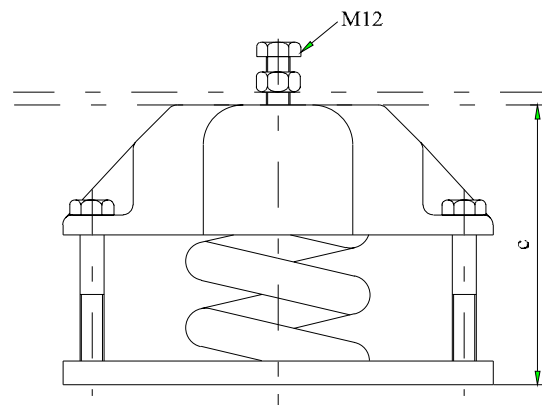

Application:


Vibration isolation of machines and installations

Technical data:

Load up to 9,5 kN.

Design:

Compact steel cast housing, helical spring following DIN 2098.

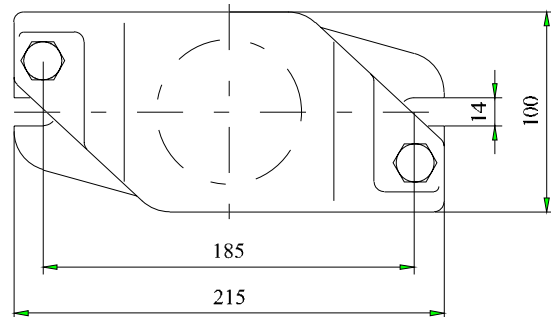

| type | vertical | | | height c [mm] | | weight [kg] |
|------------|----------------|----------------|------------------------|---------------|------------|-------------|
| | allowed load F | C vert [kN/cm] | natural frequency [Hz] | at delivery | under load | |
| P71 / 128 | 1,13 - 1,89 | 0,41 | 3,01 - 2,33 | 110 | 99 - 81 | 4,0 |
| P71 / 129 | 1,34 - 2,23 | 0,57 | 3,26 - 2,53 | 110 | 104 - 88 | 4,0 |
| P71 / 1211 | 1,89 - 3,15 | 0,76 | 3,17 - 2,46 | 160 | 149 - 133 | 4,0 |
| P71 / 1312 | 3,04 - 5,06 | 0,84 | 2,63 - 2,04 | 160 | 156 - 132 | 4,0 |
| P71 / 1226 | 3,30 - 5,49 | 4,88 | 6,08 - 4,71 | 90 | 85 - 81 | 4,0 |
| P71 / 1213 | 4,20 - 7,00 | 1,69 | 3,17 - 2,46 | 160 | 152 - 136 | 4,0 |
| P71 / 1113 | 4,36 - 7,27 | 2,77 | 3,99 - 3,09 | 120 | 115 - 105 | 4,0 |
| P71 / 1228 | 5,70 - 9,50 | 8,45 | 6,09 - 4,72 | 100 | 94 - 90 | 4,0 |